

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : D07B 1/16, 1/22, B66B 11/00		A1	(11) International Publication Number: WO 99/43885 (43) International Publication Date: 2 September 1999 (02.09.99)
(21) International Application Number: PCT/US99/03658 (22) International Filing Date: 19 February 1999 (19.02.99) (30) Priority Data: 09/031,108 26 February 1998 (26.02.98) US 09/218,990 22 December 1998 (22.12.98) US (71) Applicant: OTIS ELEVATOR COMPANY [US/US]; 10 Farm Springs, Farmington, CT 06032 (US). (72) Inventors: BARANDA, Pedro, S.; 52 Berkshire Drive, Farmington, CT 06032 (US). MELLO, Ary, O.; 6 Penfield Place, Farmington, CT 06032 (US). O'DONNELL, Hugh, J.; 289 Converse Street, Longmeadow, MA 01106 (US). PREWO, Karl, M.; 63 Indian Trail, Vernon, CT 06066 (US). (74) Agent: HENLEY, Randy; Otis Elevator Company, Intellectual Property Dept., 10 Farm Springs, Farmington, CT 06032 (US).			(81) Designated States: BR, CN, IN, JP, KR, RU, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: TENSION MEMBER FOR AN ELEVATOR

(57) Abstract

A tension member (22) for an elevator system (12) has an aspect ratio of greater than one, where aspect ratio is defined as the ratio of tension member width w to thickness t (w/t). The increase in aspect ratio results in a reduction in the maximum rope pressure and an increased flexibility as compared to conventional elevator ropes. As a result, smaller sheaves (24) may be used with this type of tension member (22). In a particular embodiment, the tension member (22) includes a plurality of individual load carrying ropes encased within a common layer of coating. The coating layer (28) separates the individual ropes (26) and defines an engagement surface (30) for engaging a traction sheave (24).

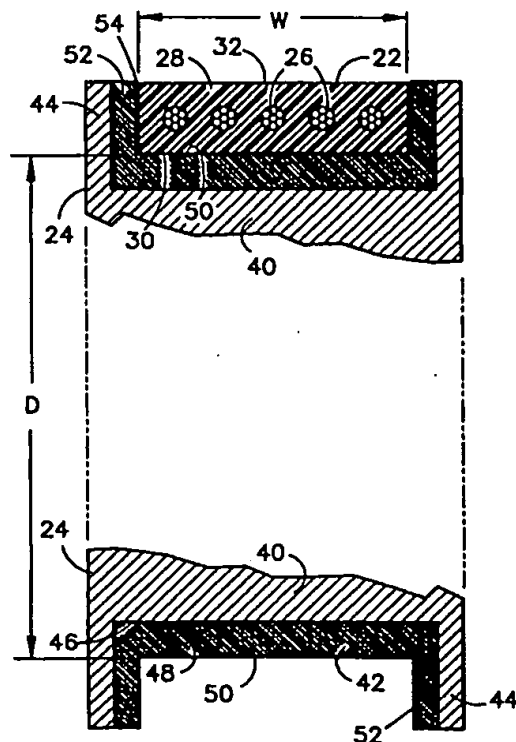

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

Tension Member for an Elevator

Technical Field

The present invention relates to elevator systems, and more particularly to
5 tension members for such elevator systems.

Background of the Invention

A conventional traction elevator system includes a car, a counterweight,
two or more ropes interconnecting the car and counterweight, a traction sheave to
10 move the ropes, and a machine to rotate the traction sheave. The ropes are
formed from laid or twisted steel wire and the sheave is formed from cast iron.
The machine may be either a geared or gearless machine. A geared machine
permits the use of higher speed motor, which is more compact and less costly, but
requires additional maintenance and space.

15 Although conventional round steel ropes and cast iron sheaves have
proven very reliable and cost effective, there are limitations on their use. One
such limitation is the traction forces between the ropes and the sheave. These
traction forces may be enhanced by increasing the wrap angle of the ropes or by
undercutting the grooves in the sheave. Both techniques reduce the durability of
20 the ropes, however, as a result of the increased wear (wrap angle) or the increased
rope pressure (undercutting). Another method to increase the traction forces is to
use liners formed from a synthetic material in the grooves of the sheave. The
liners increase the coefficient of friction between the ropes and sheave while at
the same time minimizing the wear of the ropes and sheave.

25 Another limitation on the use of round steel ropes is the flexibility and
fatigue characteristics of round steel wire ropes. Elevator safety codes today
require that each steel rope have a minimum diameter d ($d_{\min}=8$ mm for CEN;
 $d_{\min}=9.5$ mm (3/8") for ANSI) and that the D/d ratio for traction elevators be
greater than or equal to forty ($D/d \geq 40$), where D is the diameter of the sheave.

This results in the diameter D for the sheave being at least 320 mm (380 mm for ANSI). The larger the sheave diameter D , the greater torque required from the machine to drive the elevator system.

With the development of high tensile strength, lightweight synthetic fibers
5 has come the suggestion to replace steel wire ropes in elevator systems with ropes having load carrying strands formed from synthetic fibers, such as aramid fibers. Recent publications making this suggestion include: U.S. Patent No. 4,022,010, issued to Gladdenbeck et al.; U.S. Patent No. 4,624,097 issued to Wilcox; U.S. Patent No. 4,887,422 issued to Klees et al.; and U.S. Patent No. 5,566,786 issued
10 to De Angelis et al. The cited benefits of replacing steel fibers with aramid fibers are the improved tensile strength to weight ratio and improved flexibility of the aramid materials, along with the possibility of enhanced traction between the synthetic material of the rope and the sheave.

Another drawback of conventional round ropes is that the higher the rope
15 pressure, the shorter the life of the rope. Rope pressure (P_{rope}) is generated as the rope travels over the sheave and is directly proportional to the tension (F) in the rope and inversely proportional to the sheave diameter D and the rope diameter d ($P_{\text{rope}} \approx F/(Dd)$). In addition, the shape of the sheave grooves, including such traction enhancing techniques as undercutting the sheave
20 grooves, further increases the maximum rope pressure to which the rope is subjected.

Even though the flexibility characteristic of such synthetic fiber ropes may be used to reduce the required D/d ratio, and thereby the sheave diameter D , the ropes will still be exposed to significant rope pressure. The inverse relationship
25 between sheave diameter D and rope pressure limits the reduction in sheave diameter D that can be attained with conventional ropes formed from aramid fibers. In addition, aramid fibers, although they have high tensile strength, are more susceptible to failure when subjected to transverse loads. Even with

reductions in the D/d requirement, the resulting rope pressure may cause undue damage to the aramid fibers and reduce the durability of the ropes.

The above art notwithstanding, scientists and engineers under the direction of Applicants' Assignee are working to develop more efficient and durable
5 methods and apparatus to drive elevator systems.

Disclosure of the Invention

According to the present invention, a tension member for an elevator has an aspect ratio of greater than one, where aspect ratio is defined as the ratio of
10 tension member width w to thickness t ($\text{Aspect Ratio} = w/t$).

A principal feature of the present invention is the flatness of the tension member. The increase in aspect ratio results in a tension member that has an engagement surface, defined by the width dimension, that is optimized to distribute the rope pressure. Therefore, the maximum pressure is minimized
15 within the tension member. In addition, by increasing the aspect ratio relative to a round rope, which has an aspect ratio equal to one, the thickness of the tension member may be reduced while maintaining a constant cross-sectional area of the tension member.

According further to the present invention, the tension member includes a
20 plurality of individual load carrying cords encased within a common layer of coating. The coating layer separates the individual cords and defines an engagement surface for engaging a traction sheave.

As a result of the configuration of the tension member, the rope pressure may be distributed more uniformly throughout the tension member. As a result,
25 the maximum rope pressure is significantly reduced as compared to a conventionally roped elevator having a similar load carrying capacity. Furthermore, the effective rope diameter ' d ' (measured in the bending direction) is reduced for the equivalent load bearing capacity. Therefore, smaller values for the sheave diameter ' D ' may be attained without a reduction in the D/d ratio. In

addition, minimizing the diameter D of the sheave permits the use of less costly, more compact, high speed motors as the drive machine without the need for a gearbox.

In a particular embodiment of the present invention, the individual cords
5 are formed from strands of non-metallic material, such as aramid fibers. By incorporating cords having the weight, strength, durability and, in particular, the flexibility characteristics of such materials into the tension member of the present invention, the acceptable traction sheave diameter may be further reduced while maintaining the maximum rope pressure within acceptable limits. As stated
10 previously, smaller sheave diameters reduce the required torque of the machine driving the sheave and increase the rotational speed. Therefore, smaller and less costly machines may be used to drive the elevator system.

In another particular embodiment of the present invention, the individual cords are formed from strands of metallic material, such as steel. By
15 incorporating cords having the flexibility characteristics of appropriately sized and constructed metallic materials into the tension member of the present invention, the acceptable traction sheave diameter may be minimized while maintaining the maximum rope pressure within acceptable limits.

In a further particular embodiment of the present invention, a traction
20 drive for an elevator system includes a tension member having an aspect ratio greater than one and a traction sheave having a traction surface configured to receive the tension member. The tension member includes an engagement surface defined by the width dimension of the tension member. The traction surface of the sheave and the engagement surface are complementarily contoured to provide
25 traction and to guide the engagement between the tension member and the sheave. In an alternate configuration, the traction drive includes a plurality of tension members engaged with the sheave and the sheave includes a pair of rims disposed on opposite sides of the sheave and one or more dividers disposed between adjacent tension members. The pair of rims and dividers perform the function of

guiding the tension member to prevent gross alignment problems in the event of slack rope conditions, etc.

In a still further embodiment, the traction surface of the sheave is defined by a material that optimizes the traction forces between the sheave and the tension member and minimizes the wear of the tension member. In one configuration, the traction surface is integral to a sheave liner that is disposed on the sheave. In another configuration, the traction surface is defined by a coating layer that is bonded to the traction sheave. In a still further configuration, the traction sheave is formed from the material that defines the traction surface.

Although described herein as primarily a traction device for use in an elevator application having a traction sheave, the tension member may be useful and have benefits in elevator applications that do not use a traction sheave to drive the tension member, such as indirectly roped elevator systems, linear motor driven elevator systems, or self-propelled elevators having a counterweight. In these applications, the reduced size of the sheave may be useful in order to reduce space requirements for the elevator system. The foregoing and other objects, features and advantages of the present invention become more apparent in light of the following detailed description of the exemplary embodiments thereof, as illustrated in the accompanying drawings.

Brief Description of the Drawings

Figure 1 is perspective view of an elevator system having a traction drive according to the present invention;

Figure 2 is a sectional, side view of the traction drive, showing a tension member and a sheave;

Figure 3 is a sectional, side view of an alternate embodiment showing a plurality of tension members;

Figure 4 is another alternate embodiment showing a traction sheave having a convex shape to center the tension member;

Figure 5 is a further alternate embodiment showing a traction sheave and tension member having complementary contours to enhance traction and to guide the engagement between the tension member and the sheave;

Figure 6a is a sectional view of the tension member; Figure 6b is a
5 sectional view of an alternate embodiment of a tension member; Figure 6c is a sectional view of a further alternate embodiment of a tension member; and Figure 6d is a sectional view of a still further embodiment of a tension member.

Figure 7 is a magnified cross sectional view of a single cord of an alternate embodiment of the invention having six strands twisted around a central stand;

10 Figure 8 is a magnified cross sectional view of another alternate embodiment of a single cord of the invention; and

Figure 9 is a magnified cross sectional view of a still further alternate embodiment of the invention.

15 Best Mode for Carrying Out the Invention

Illustrated in Figure 1 is a traction elevator system 12. The elevator system 12 includes a car 14, a counterweight 16, a traction drive 18, and a machine 20. The traction drive 18 includes a tension member 22, interconnecting the car 14 and counterweight 16, and a traction sheave 24. The tension member
20 22 is engaged with the sheave 24 such that rotation of the sheave 24 moves the tension member 22, and thereby the car 14 and counterweight 16. The machine 20 is engaged with the sheave 24 to rotate the sheave 24. Although shown as an geared machine 20, it should be noted that this configuration is for illustrative purposes only, and the present invention may be used with geared or gearless
25 machines.

The tension member 22 and sheave 24 are illustrated in more detail in Figure 2. The tension member 22 is a single device that integrates a plurality of cords 26 within a common coating layer 28. Each of the ropes 26 is formed from laid or twisted strands of high strength synthetic, non-metallic fibers, such as

commercially available aramid fibers. The cords 26 are equal length, are approximately equally spaced widthwise within the coating layer 28 and are arranged linearly along the width dimension. The coating layer 28 is formed from a polyurethane material, preferably a thermoplastic urethane, that is extruded onto
5 and through the plurality of cords 26 in such a manner that each of the individual cords 26 is restrained against longitudinal movement relative to the other cords 26. Transparent material is an alternate embodiment which may be advantageous since it facilitates visual inspection of the flat rope. Structurally, of course, the color is irrelevant. Other materials may also be used for the coating layer 28 if
10 they are sufficient to meet the required functions of the coating layer: traction, wear, transmission of traction loads to the cords 26 and resistance to environmental factors. It should further be understood that if other materials are used which do not meet or exceed the mechanical properties of a thermoplastic urethane, then the additional benefit of the invention of dramatically reducing
15 sheave diameter may not be fully achievable. With the thermoplastic urethane mechanical properties the sheave diameter is reducible to 100 millimeters or less. The coating layer 28 defines an engagement surface 30 that is in contact with a corresponding surface of the traction sheave 24.

As shown more clearly in Figure 6a, the tension member 22 has a width w ,
20 measured laterally relative to the length of the tension member 22, and a thickness t_1 , measured in the direction of bending of the tension member 22 about the sheave 24. Each of the cords 26 has a diameter d and are spaced apart by a distance s . In addition, the thickness of the coating layer 28 between the cords 26 and the engagement surface 30 is defined as t_2 and between the cords 26 and the
25 opposite surface is defined as t_3 , such that $t_1 = t_2 + t_3 + d$.

The overall dimensions of the tension member 22 results in a cross-section having an aspect ratio of much greater than one, where aspect ratio is defined as the ratio of width w to thickness t_1 or (Aspect Ratio= w/t_1). An aspect ratio of one corresponds to a circular cross-section, such as that common in conventional

round ropes. The higher the aspect ratio, the more flat the tension member 22 is in cross-section. Flattening out the tension member 22 minimizes the thickness t_1 and maximizes the width w of the tension member 22 without sacrificing cross-sectional area or load carrying capacity. This configuration results in distributing
5 the rope pressure across the width of the tension member 22 and reduces the maximum rope pressure relative to a round rope of comparable cross-sectional area and load carrying capacity. As shown in Figure 2, for the tension member 22 having five individual cords 26 disposed within the coating layer 28, the aspect ratio is greater than five. Although shown as having an aspect ratio greater than
10 five, it is believed that benefits will result from tension members having aspect ratios greater than one, and particularly for aspect ratios greater than two.

The separation s between adjacent cords 26 is dependant upon the materials and manufacturing processes used in the tension member 22 and the distribution of rope stress across the tension member 22. For weight
15 considerations, it is desirable to minimize the spacing s between adjacent cords 26, thereby reducing the amount of coating material between the cords 26. Taking into account rope stress distribution, however, may limit how close the cords 26 may be to each other in order to avoid excessive stress in the coating layer 28 between adjacent cords 26. Based on these considerations, the spacing
20 may be optimized for the particular load carrying requirements.

The thickness t_2 of the coating layer 28 is dependant upon the rope stress distribution and the wear characteristics of the coating layer 28 material. As before, it is desirable to avoid excessive stress in the coating layer 28 while providing sufficient material to maximize the expected life of the tension member
25 22.

The thickness t_3 of the coating layer 28 is dependant upon the use of the tension member 22. As illustrated in Figure 1, the tension member 22 travels over a single sheave 24 and therefore the top surface 32 does not engage the sheave 24. In this application, the thickness t_3 may be very thin, although it must be

sufficient to withstand the strain as the tension member 22 travels over the sheave 24. It may also be desirable to groove the tension member surface 32 to reduce tension in the thickness t_3 . On the other hand, a thickness t_3 equivalent to that of t_2 may be required if the tension member 22 is used in an elevator system that
5 requires reverse bending of the tension member 22 about a second sheave. In this application, both the upper 32 and lower surface 30 of the tension member 22 is an engagement surface and subject to the same requirement of wear and stress.

The diameter d of the individual cords 26 and the number of cords 26 is dependent upon the specific application. It is desirable to maintain the thickness d
10 as small as possible, as hereinbefore discussed, in order to maximize the flexibility and minimize the stress in the cords 26.

Although illustrated in Figure 2 as having a plurality of round ropes 26 embedded within the coating layer 28, other styles of individual ropes may be used with the tension member 22, including those that have aspect ratios greater
15 than one, for reasons of cost, durability or ease of fabrication. Examples include oval shaped ropes 34 (Figure 6b), flat or rectangular shaped ropes 36 (Figure 6c), or a single flat rope 38 distributed through the width of the tension member 22 as shown in Figure 6d. An advantage of the embodiment of Figure 6d is that the distribution of rope pressure may be more uniform and therefore the maximum
20 rope pressure within the tension member 22 may be less than in the other configurations. Since the ropes are encapsulated within a coating layer, and since the coating layer defines the engagement surface, the actual shape of the ropes is less significant for traction and may be optimized for other purposes.

In another preferred embodiment, each of the cords 26 is formed from
25 preferably seven twisted strands, each made up of seven twisted metallic wires. In a preferred embodiment of this configuration of the invention, a high carbon steel is employed. The steel is preferably cold drawn and galvanized for the recognized properties of strength and corrosion resistance of such processes. The

coating layer is preferably a polyurethane material that is ether based and includes a fire retardant composition.

In a preferred embodiment incorporating steel cords, referring to Figure 7, each strand 27 of a cord 26 comprises seven wires with six of the wires 29 twisted
5 around a center wire 31. Each cord 26, comprises one strand 27a which is centrally located and six additional outer strands 27b that are twisted around the central strand 27a. Preferably, the twisting pattern of the individual wires 29 that form the central strand 27a are twisted in one direction around central wire 31 of central strand 27a while the wires 29 of outer strands 27b are twisted around the
10 central wire 31 of the outer strands 27b in the opposite direction. Outer strands 27b are twisted around central strand 27a in the same direction as the wires 29 are twisted around center wire 31 in strand 27a. For example, the individual strands in one embodiment comprise the central wire 31, in center strand 27a, with the six twisted wires 29 twisting clockwise; the wires 29 in the outer strands 27b twisting
15 counterclockwise around their individual center wires 31 while at the cord 26 level the outer strands 27b twist around the central strand 27a in the clockwise direction. The directions of twisting improve the characteristics of load sharing in all of the wires of the cord.

It is important to the success of this embodiment of the invention to
20 employ wire 29 of a very small size. Each wire 29 and 31 are less than .25 millimeters in diameter and preferably in the range of about .10 millimeters to .20 millimeters in diameter. In a particular embodiment, the wires are of a diameter of .175 millimeters in diameter. The small sizes of the wires preferably employed contribute to the benefit of the use of a sheave of smaller diameter. The smaller
25 diameter wire can withstand the bending radius of a smaller diameter sheave (around 100 millimeters in diameter) without placing too much stress on the strands of the flat rope. Because of the incorporation of a plurality of small cords 26, preferably about 1.6 millimeters in total diameter in this particular embodiment of the invention, into the flat rope elastomer, the pressure on each

cord is significantly diminished over prior art ropes. Cord pressure is decreased at least as $n^{-1/2}$ with n being the number of parallel cords in the flat rope, for a given load and wire cross section.

In an alternate embodiment of the configuration incorporating cords
5 formed from metallic materials, referring to Figure 8, the center wire 35 of the center strand 37a of each cord 26 employs a larger diameter. For example, if the wires 29 of the previous embodiment (.175 millimeters) are employed, the center wire 35 of the center strand only of all cords would be about .20- .22 millimeters in diameter. The effect of such a center wire diameter change is to reduce contact
10 between wires 29 surrounding wire 35 as well as to reduce contact between strands 37b which are twisted around strand 37a. In such an embodiment the diameter of cord 26 will be slightly greater than the previous example of 1.6 millimeters.

In a third embodiment of the configuration incorporating cords fromed
15 from metallic materials, referring to Figure 9, the concept of the embodiment of Figure 8 is expanded to further reduce wire-to-wire and strand-to-strand contact. Three distinct sizes of wires are employed to construct the cords of the invention. In this embodiment the largest wire is the center wire 202 in the center strand 200. The intermediate diameter wires 204 are located around the center wire 202 of
20 center strand 200 and therefore makeup a part of center strand 200. This intermediate diameter wire 204 is also the center wire 206 for all outer strands 210. The smallest diameter wires employed are numbered 208. These wrap each wire 206 in each outer strand 210. All of the wires in the embodiment are still less than .25 mm in diameter. In a representative embodiment, wires 202 may be
25 0.21 mm; wires 204 may be 0.19 mm; wires 206 may be 0.19 mm; and wires 208 may be 0.175 mm. It will be appreciated that in this embodiment wires 204 and 206 are of equivalent diameters and are numbered individually to provide locational information only. It is noted that the invention is not limited by wires 204 and 206 being identical in diameter. All of the diameters of wires provided

are for example only and could be rearranged with the joining principle being that contact among the outer wires of the central strand is reduced; that contact among the outer wires of the outer strands is reduced and that contact among the outer strands is reduced. In the example provided, (only for purpose of example) the
5 space obtained between the outer wires of outer strands is .014 mm.

Referring back to Figure 2, the traction sheave 24 includes a base 40 and a liner 42. The base 40 is formed from cast iron and includes a pair of rims 44 disposed on opposite sides of the sheave 24 to form a groove 46. The liner 42 includes a base 48 having a traction surface 50 and a pair of flanges 52 that are
10 supported by the rims 44 of the sheave 24. The liner 42 is formed from a polyurethane material, such as that described in commonly owned US Patent No. 5,112,933. or any other suitable material providing the desired traction with the engagement surface 30 of the coating layer 28 and wear characteristics. Within the traction drive 18, it is desired that the sheave liner 42 wear rather than the
15 sheave 24 or the tension member 22 due to the cost associated with replacing the tension member 22 or sheave 24. As such, the liner 42 performs the function of a sacrificial layer in the traction drive 18. The liner 42 is retained, either by bonding or any other conventional method, within the groove 46 and defines the traction surface 50 for receiving the tension member 22. The traction surface 50
20 has a diameter D. Engagement between the traction surface 50 and the engagement surface 30 provides the traction for driving the elevator system 12. The diameter of a sheave for use with the traction member described hereinabove is dramatically reduced from prior art sheave diameters. More particularly, sheaves to be employed with the flat rope of the invention may be reduced in
25 diameter to 100 mm or less. As will be immediately recognized by those skilled in the art, such a diameter reduction of the sheave allows for the employment of a much smaller machine. In fact, machine sizes may fall to $\frac{1}{4}$ of their conventional size in for example low rise gearless applications for a typical 8 passenger duty elevators. This is because torque requirements would be cut to about $\frac{1}{4}$ with a

100 mm sheave and the rpm of the motor would be increased. Cost for the machines indicated accordingly falls.

Although illustrated as having a liner 42, it should be apparent to those skilled in the art that the tension member 22 may be used with a sheave not
5 having a liner 42. As an alternative, the liner 42 may be replaced by coating the sheave with a layer of a selected material, such as polyurethane, or the sheave may be formed or molded from an appropriate synthetic material. These alternatives may prove cost effective if it is determined that, due to the diminished size of the sheave, it may be less expensive to simply replace the entire sheave
10 rather than replacing sheave liners.

The shape of the sheave 24 and liner 42 defines a space 54 into which the tension member 22 is received. The rims 44 and the flanges 52 of the liner 42 provide a boundary on the engagement between the tension member 22 and the sheave 24 and guide the engagement to avoid the tension member 22 becoming
15 disengaged from the sheave 24.

An alternate embodiment of the traction drive 18 is illustrated in Figure 3. In this embodiment, the traction drive 18 includes three tension members 56 and a traction sheave 58. Each of the tension members 56 is similar in configuration to the tension member 22 described above with respect to Figures 1 and 2. The
20 traction sheave 58 includes a base 62, a pair of rims 64 disposed on opposite side of the sheave 58, a pair of dividers 66, and three liners 68. The dividers 66 are laterally spaced from the rims 64 and from each other to define three grooves 70 that receive the liners 68. As with the liner 42 described with respect to Figure 2, each liner 68 includes a base 72 that defines a traction surface 74 to receive one of
25 the tension members 56 and a pair of flanges 76 that abut the rims 64 or dividers 66. Also as in Figure 2, the liner 42 is wide enough to allow a space 54 to exist between the edges of the tension member and the flanges 76 of the liner 42.

Alternative construction for the traction drive 18 are illustrated in Figures 4 and 5. Figure 4 illustrates a sheave 86 having a convex shaped traction surface

88. The shape of the traction surface 88 urges the flat tension member 90 to remain centered during operation. Figure 5 illustrates a tension member 92 having a contoured engagement surface 94 that is defined by the encapsulated cords 96. The traction sheave 98 includes a liner 100 that has a traction surface 102 that is contoured to complement the contour of the tension member 92. The complementary configuration provides guidance to the tension member 92 during engagement and, in addition, increases the traction forces between the tension member 92 and the traction sheave 98.

Use of tension members and traction drives according to the present invention may result in significant reductions in maximum rope pressure, with corresponding reductions in sheave diameter and torque requirements. The reduction in maximum rope pressure results from the cross-sectional area of the tension member having an aspect ratio of greater than one. For this configuration, assuming that the tension member is such as that shown in Figure 6d, the calculation for approximate maximum rope pressure is determined as follows:

$$P_{\max} \equiv (2F/Dw)$$

Where F is the maximum tension in the tension member. For the other configurations of Figure 6a-c, the maximum rope pressure would be approximately the same although slightly higher due to the discreteness of the individual ropes. For a round rope within a round groove, the calculation of maximum rope pressure is determined as follows:

$$P_{\max} \equiv (2F/Dd)(4/\pi)$$

The factor of $(4/\pi)$ results in an increase of at least 27% in maximum rope pressure, assuming that the diameters and tension levels are comparable. More significantly, the width w is much larger than the cord diameter d, which results in greatly reduced maximum rope pressure. If the conventional rope grooves are undercut, the maximum rope pressure is even greater and therefore greater relative reductions in the maximum rope pressure may be achieved using a flat tension member configuration. Another advantage of the tension member

according to the present invention is that the thickness t_1 of the tension member may be much smaller than the diameter d of equivalent load carrying capacity round ropes. This enhances the flexibility of the tension member as compared to conventional ropes.

- 5 Although the invention has been shown and described with respect to exemplary embodiments thereof, it should be understood by those skilled in the art that various changes, omissions, and additions may be made thereto, without departing from the spirit and scope of the invention.

What is claimed is:

1. A tension member for providing lifting force to a car of an elevator system, the tension member being engageable with a rotatable sheave of the
5 elevator system, the tension member having a width w , a thickness t measured in the bending direction, and an engagement surface defined by the width dimension of the tension member, wherein the tension member has an aspect ratio, defined as the ratio of width w relative to thickness t , greater than one.
- 10 2. The tension member according to Claim 1, further including a plurality of individual load carrying cords encased within a common layer of coating, the coating layer separating the individual cords, wherein the coating layer defines the engagement surface for engaging the sheave.
- 15 3. The tension member according to Claim 2, wherein the individual cords are formed from strands of non-metallic material.
4. The tension member according to Claim 1, wherein the tension member is formed from strands of non-metallic material.
- 20 5. The tension member according to Claim 2, wherein the coating layer blocks differential longitudinal motion of the plurality of individual cords.
6. The tension member according to Claim 5, wherein the coating layer
25 retains each of the cords to block the occurrence of differential motion.
7. The tension member according to Claim 1, wherein the aspect ratio is greater than or equal to two.

8. The tension member according to Claim 2, wherein the individual cords are spaced widthwise within the common coating layer.
9. The tension member according to Claim 2, wherein the coating layer
5 defines a single engagement surface for the plurality of individual cords.
10. The tension member according to Claim 9, wherein the coating layer extends widthwise such that the engagement surface extends about the plurality of individual cords.
- 10
11. The tension member according to Claim 1, wherein the sheave includes an engagement surface, and wherein the engagement surface of the tension member is contoured to complement the engagement surface of the sheave.
- 15
12. The tension member according to Claim 2, wherein the engagement surface of the coating layer is shaped by the outer surface of the cords to enhance the traction between the traction sheave and the traction member.
13. The tension member according to Claim 1, further including a coating
20 layer formed from an elastomer.
14. The tension member according to Claim 2, wherein the coating layer is formed from an elastomer.

15. The tension member according to Claim 2, wherein the maximum rope pressure of the load carrying cords is approximately defined by the following equation:

5
$$P_{\max} = (2F/Dw)$$

Where F is the maximum tension in the tension member and D is the diameter of the traction sheave.

16. The tension member according to Claim 1, wherein the engagement
10 surface is shaped to guide the tension member during engagement with the sheave.

17. The tension member according to Claim 2, wherein the engagement
15 surface of the coating layer is shaped by the outer surface of the cords to guide the tension member during engagement with the sheave.

18. The tension member according to Claim 2, wherein the plurality of individual cords are arranged linearly.

20 19. The tension member according to Claim 8, wherein the plurality of individual cords are arranged linearly.

20. The tension member according to Claim 2, wherein the individual cords are round in cross-section.

25

21. The tension member according to Claim 2, wherein the individual cords have an aspect ratio greater than one.

22. The tension member according to Claim 2, wherein the individual cords are flat in cross-section.
23. The tension member according to claim 2, wherein the individual cords are metallic.
24. The tension member according to Claim 23, wherein the individual cords are constructed from a plurality of individual wires, including wires less than .25 millimeters in diameter.
25. The tension member according to claim 24, wherein said plurality of wires are in a twisted pattern creating strands of several wires and a center wire.
26. The tension member according to claim 25, wherein said strand pattern is defined as said several wires twisted around said one center wire.
27. The tension member according to claim 24, wherein all wires are less than .25 millimeters in diameter.
28. A tension member according to claim 26, wherein said plurality of cords are each in a pattern comprising several strands around a center strand.
29. A tension member according to claim 28, wherein said cord pattern is several outer strands twisted around said center strand.

30. A tension member according to claim 29, wherein said center strand comprises said several wires twisted around said one center wire in a first direction and said outer strands each comprise said several wires twisted around said one center wire in a second direction and said outer strands are twisted
5 around said center strand in said first direction.
31. The tension member according to claim 29, wherein each said center wire of each strand is larger than all wires twisted therearound.
- 10 32. The tension member according to claim 31, wherein said center wire of said center strand is larger than said center wire of each said outer strands.
33. The tension member according to claim 24, wherein said wires are in the range of about .10 millimeters to about .20 millimeters.
- 15 34. The tension member according to claim 29, wherein said center wire in said center strand is of a larger diameter than all other wires in each cord of said plurality of cords.
- 20 35. The tension member according to claim 13, wherein the elastomer is urethane.
36. The tension member according to Claim 35, wherein the urethane material is a thermoplastic urethane.
- 25 37. The tension member according to Claim 2, wherein the coating layer is transparent.

38. The tension member according to Claim 2, wherein the coating layer is flame retardant.

39. A traction drive for an elevator system, the elevator system including a car
5 and a counterweight, the traction drive including a traction sheave driven by a machine and a tension member interconnecting the car and counterweight, the tension member having a width w , a thickness t measured in the bending direction, and an engagement surface defined by the width dimension of the tension member, wherein the tension member has an aspect ratio, defined as the
10 ratio of width w relative to thickness t , of greater than one, the traction sheave including a traction surface configured to receive the engagement surface of the tension member such that the traction between the sheave and tension member moves the car and counterweight.

15 40. The traction drive according to Claim 39, wherein the traction surface includes a diameter D , and wherein the diameter D varies laterally to provide a guidance mechanism during engagement of the tension member and traction sheave.

20 41. The traction drive according to Claim 39, wherein the traction sheave includes a pair of retaining rims on opposite sides of the traction sheave.

42. The traction drive according to Claim 39, including a plurality of the tension members.

25

43. The traction drive according to Claim 42, wherein the traction sheave includes a traction surface for each tension member, and further includes one or more dividers that separate the plurality of traction surfaces.

44. The traction drive according to Claim 39, wherein the traction surface is formed from a non-metallic material.
45. The traction drive according to Claim 39, further including a sheave liner
5 disposed about the traction sheave, wherein the sheave liner defines the traction surface.
46. The traction drive according to Claim 39, wherein the traction surface is defined by a coating layer that is bonded to the traction sheave.
- 10 47. The traction drive according to Claim 39, wherein the traction sheave is formed from the material defining the traction surface.
48. The traction drive according to Claim 47, wherein the traction sheave is
15 formed from polyurethane.
49. A sheave for an elevator system, the elevator system including one or more tension members, each tension member having a width w , a thickness t measured in the bending direction, and an engagement surface defined by the
20 width dimension of the tension member, wherein the tension member has an aspect ratio, defined as the ratio of width w relative to thickness t , of greater than one the traction sheave including a surface configured to receive the engagement surface of the tension member.
- 25 50. The sheave according to Claim 49, wherein the elevator system further includes a car and counterweight interconnected by the tension members, and wherein the surface of the sheave is a traction surface configured to receive the engagement surface such that traction between the sheave and tension member moves the car and counterweight.

51. A sheave according to Claim 50, wherein the traction surface is contoured to complement the engagement surface of the tension member such that traction between the sheave and tension member is enhanced.
- 5
52. The sheave according to Claim 49, wherein the traction surface is contoured to complement the engagement surface of the tension member to guide the tension member during engagement with the sheave.
- 10 53. The sheave according to Claim 49, wherein the surface includes a diameter D, and wherein the diameter D varies laterally to provide a guidance mechanism during engagement of the tension member and sheave.
- 15 54. The sheave according to Claim 49, wherein the traction sheave includes a pair of retaining rims on opposite sides of the sheave.
55. The sheave according to Claim 49, wherein the sheave includes a surface for each tension member, and further includes one or more dividers that separate the plurality of surfaces.
- 20 56. The sheave according to Claim 49, wherein the surface is formed from a non-metallic material.
- 25 57. The sheave according to Claim 56, wherein the surface is formed from polyurethane.
58. The sheave according to Claim 49, further including a sheave liner disposed about the sheave, wherein the sheave liner defines the surface.

59. The sheave according to Claim 49, wherein the surface is formed from a non-metallic coating bonded to the sheave.

60. The sheave according to Claim 49, wherein the sheave is formed from a non-metallic material, and wherein the non-metallic material defines the surface for engaging the engagement surface of the one or more tension members.

61. A liner for a sheave of an elevator system, the elevator system including one or more tension members, each tension member having a width w , a thickness t measured in the bending direction, and an engagement surface defined by the width dimension of the tension member, wherein the tension member has an aspect ratio, defined as the ratio of width w relative to thickness t , of greater than one, the liner disposed in a fixed relationship to the sheave and including a surface configured to receive the engagement surface of the tension member.

15

62. The liner according to Claim 61, wherein the elevator system further includes a car and counterweight interconnected by the tension members, and wherein the surface of the liner is a traction surface configured to receive the engagement surface such that traction between the liner and tension member moves the car and counterweight.

20

63. The liner according to Claim 62, wherein the surface is contoured to complement the engagement surface of the tension member such that traction between the liner and tension member is enhanced.

25

64. The liner according to Claim 61, wherein the surface is contoured to complement the engagement surface of the tension member to guide the tension member during engagement with the liner.

65. The liner according to Claim 61, wherein the surface includes a diameter D, and wherein the diameter D varies laterally to provide a guidance mechanism during engagement of the tension member and liner.


5 66. The liner according to Claim 61, wherein the liner is formed from a non-metallic material.

67. The liner according to Claim 66, wherein the liner is formed from polyurethane.

10

68. The liner according to Claim 61, wherein the elevator system includes a plurality of tension members, and wherein the liner extends laterally to accommodate the plurality of tension members.

FIG. 1

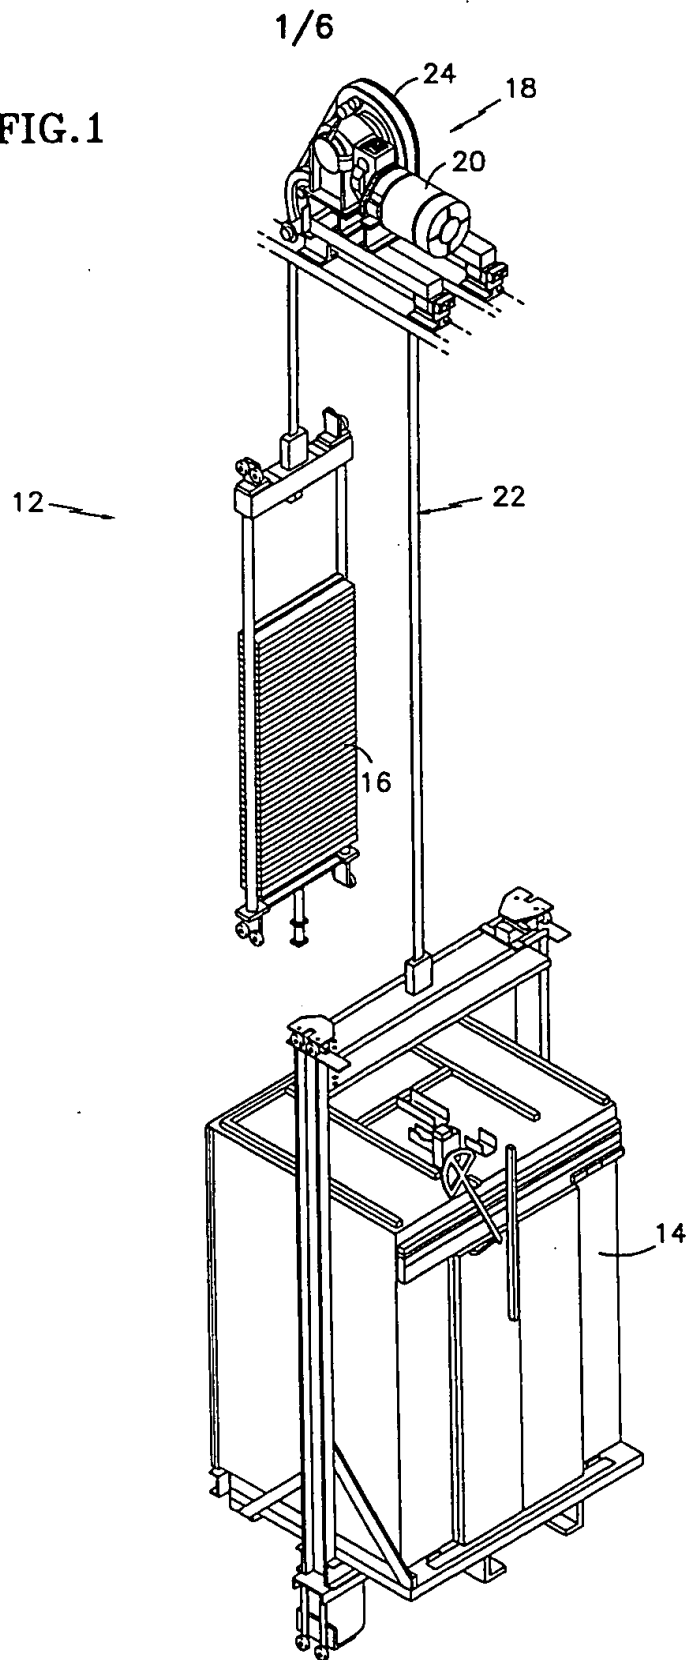

2/6

FIG.2


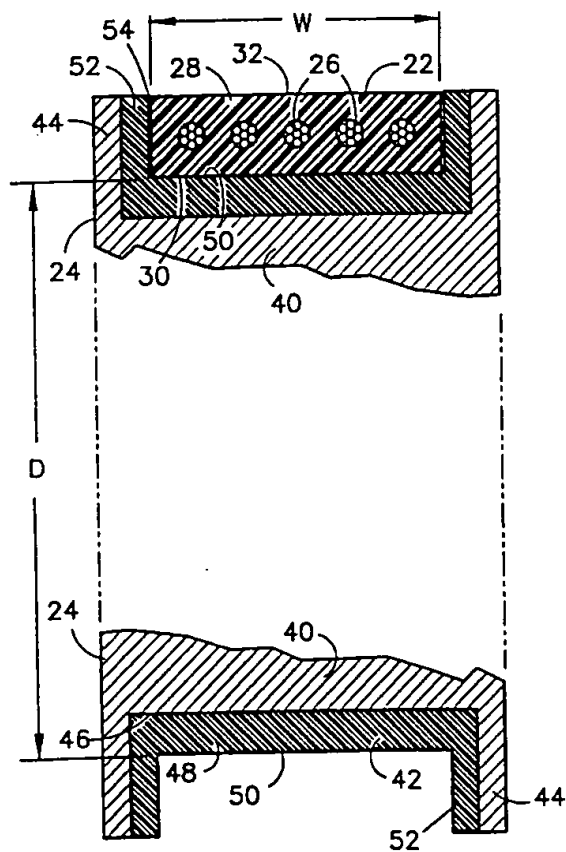


FIG.3

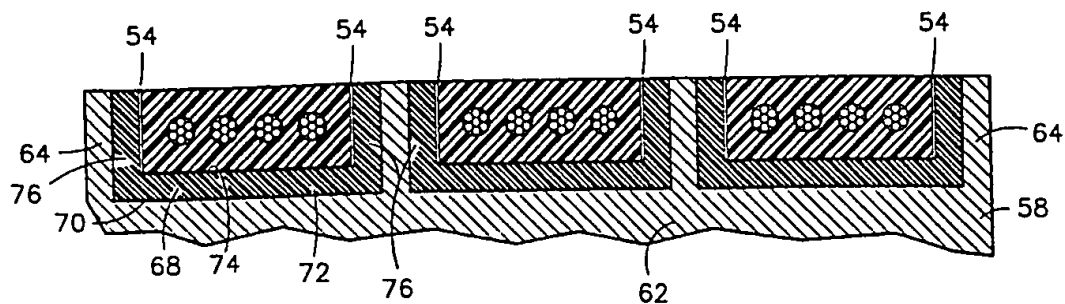

SUBSTITUTE SHEET (RULE 26)

3/3

FIG. 4

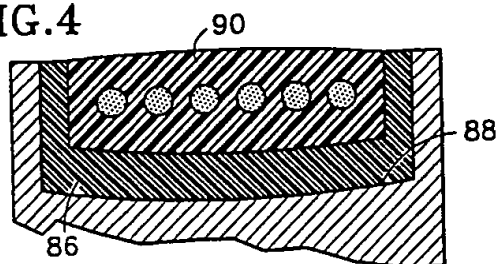


FIG. 5

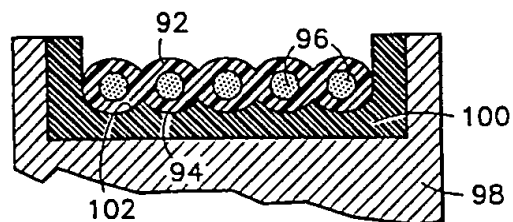


FIG. 6a

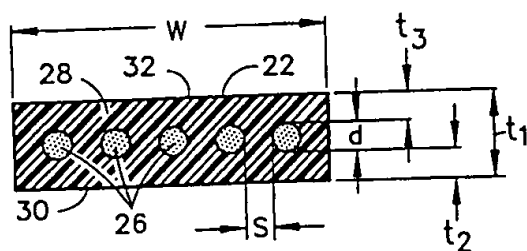


FIG. 6b




FIG. 6c





FIG. 6d

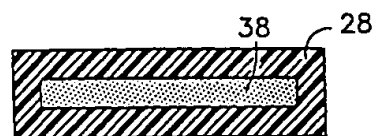

4/6

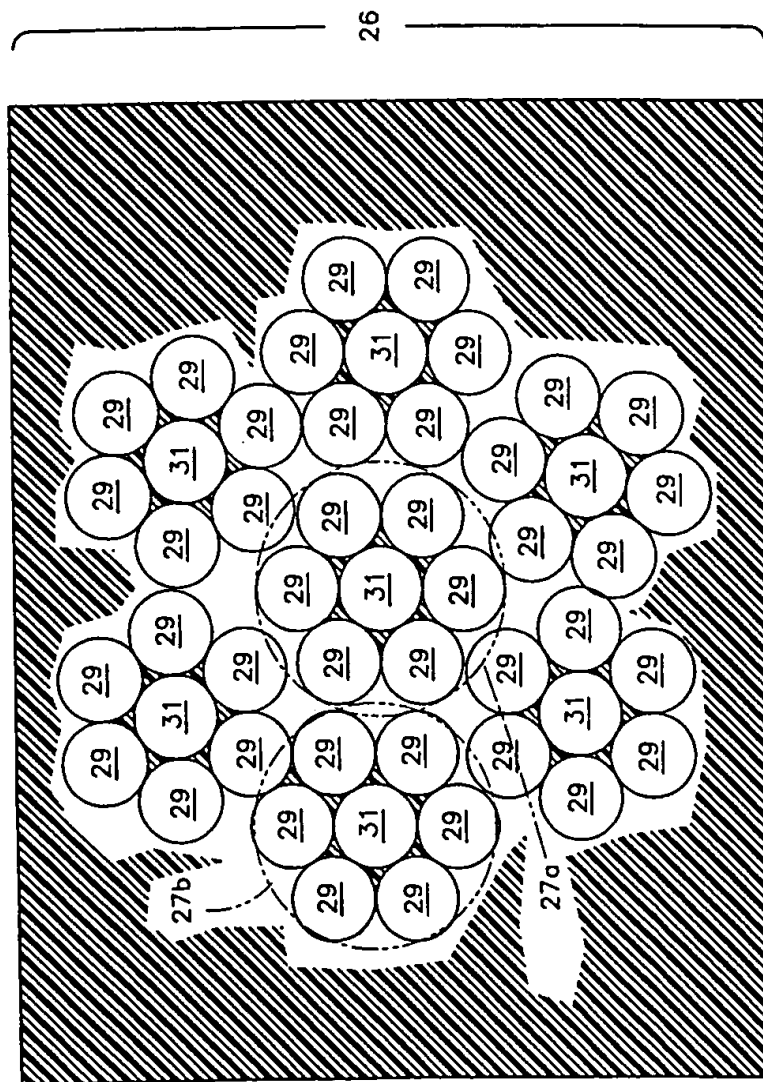


FIG. 7

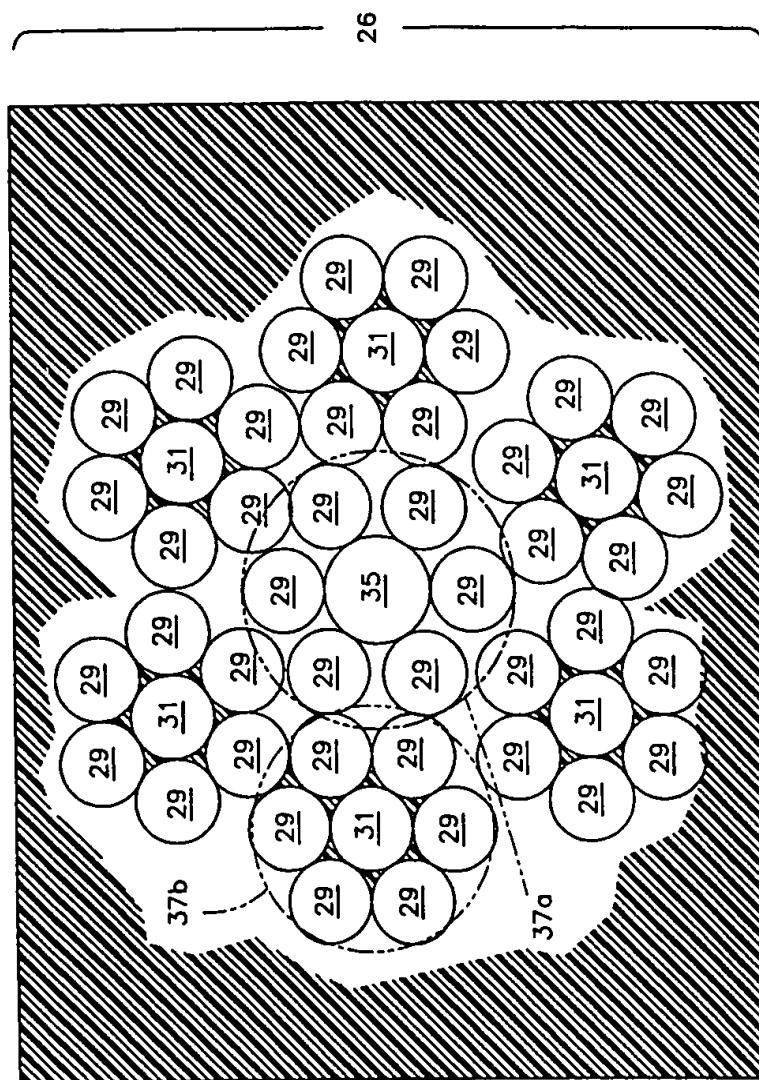


FIG. 8

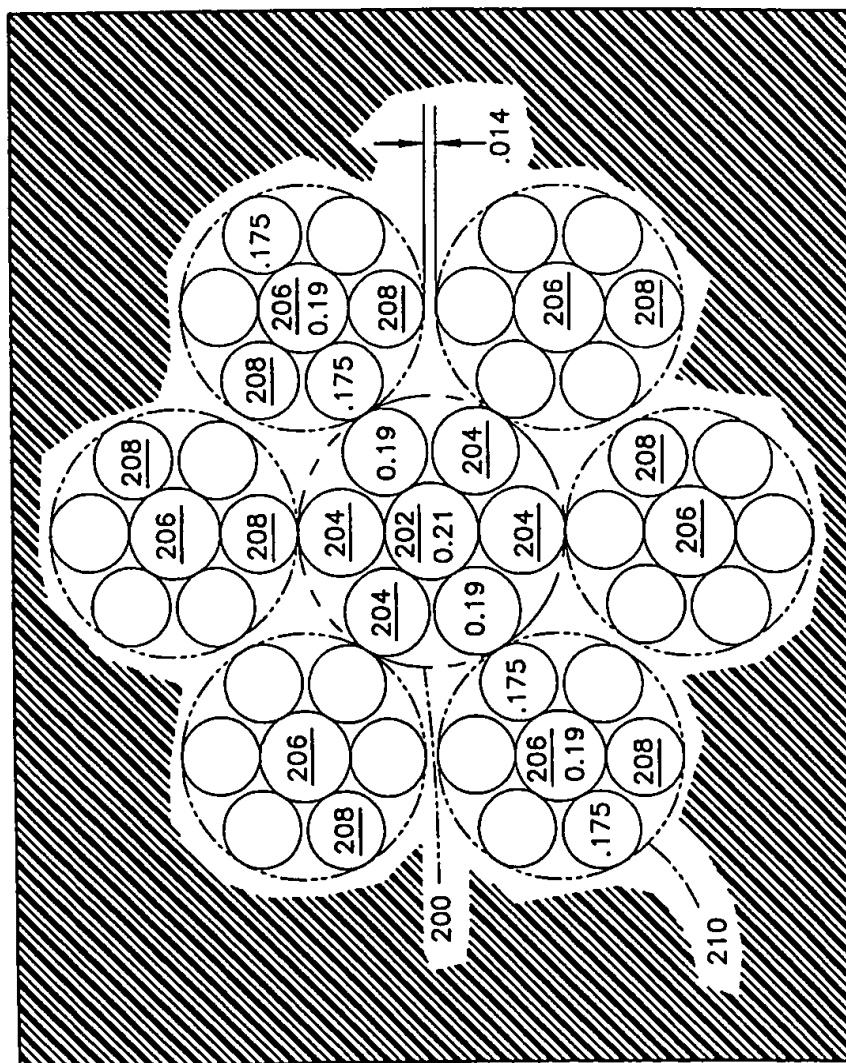


FIG. 9

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/03658

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 D07B1/16 D07B1/22 B66B11/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 D07B B66B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, X	WO 98 29327 A (KONE CORPORATION) 9 July 1998 see page 7, line 28 - page 9, line 14 see page 11, line 13 - line 19 ---	1-10, 13, 14, 18-20, 35, 36, 39, 40, 49, 50, 53
X	GB 1 362 514 A (TELEFLEX LTD.) 7 August 1974 see page 1, line 62 - line 84 see page 2, line 55 - line 75	1, 2, 5-10, 13, 14, 18-20, 23, 25, 26, 35, 36
Y	---	39, 49, 61
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

31 May 1999

Date of mailing of the international search report

23/06/1999

Name and mailing address of the ISA
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Goodall, C

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/03658

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT


Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 112 933 A (H.J. O'DONNELL ET AL) 12 May 1992 cited in the application see column 1, line 15 - line 54 see column 3, line 10 - line 21	39,49,61
A	-----	44,45, 50-52, 56-58, 62-64, 66,67

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/03658

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9829327 A	09-07-1998	FI 965243 A AU 7890098 A AU 7403798 A WO 9829326 A	01-07-1998 31-07-1998 31-07-1998 09-07-1998
GB 1362514 A	07-08-1974	GB 1362513 A	07-08-1974
US 5112933 A	12-05-1992	AU 634438 B AU 1217792 A GB 2254855 A, B	18-02-1993 03-12-1992 21-10-1992



**Derwent Data
Available on Delphion**

[Browse Codes](#)
[IP Listings](#)
[Prior Art](#)
[Derwent](#)
[Advanced](#)
[Boolean](#)

[Log Out](#)
[Order Form](#)
[View Cart](#)

The Delphion
Integrated
View

(See WO09943885)

Purchase Document: **Other Views:**
[More choices...](#) [Collapse Details](#) | [INPADOC](#) | [Derwent...](#)

Title: **EP1060305A1: TENSION MEMBER FOR AN ELEVATOR**

Country: **EP European Patent Office (EPO)**

Kind: **A1 Publ. of Application with search report**

Inventor(s): **BARANDA, Pedro, S.
MELLO, Ary, O.
O'DONNELL, Hugh, J.
PREWO, Karl, M.**

[No Image](#)

Applicant/Assignee



OTIS ELEVATOR COMPANY

[News, Profiles, Stocks and More about this company](#)

Issued/Filed Dates:

Dec. 20, 2000 / Feb. 19, 1999

Publication Number:

EP1999000908282

IPC Class:

D07B 1/16; D07B 1/22; B66B 11/00;

Priority Number(s):

**Feb. 26, 1998 US1998000031108
Dec. 22, 1998 US1998000218990**

Legal Status:

Gazette date	Code	Description (remarks) List all possible codes for EP
Dec. 20, 2000	AK	Designated contracting states: (DE ES FR IT PT)
Dec. 20, 2000	17P	Request for examination filed (20000926)
Dec. 20, 2000	A1	Publication of application with search report
Feb. 19, 1999	AE	Ep-application
Feb. 19, 1999	AA	Priority

Designated

Countries:

DE, ES, FR, IT, PT

Abstract:

A tension member (22) for an elevator system (12) has an aspect ratio of greater than one, where aspect ratio is defined as the ratio of tension member width w to thickness t (w/t). The increase in aspect ratio results in a reduction in the maximum rope pressure and an increased flexibility as compared to conventional elevator ropes. As a result, smaller sheaves (24) may be used with this type of tension member (22). In a particular embodiment, the tension



member (22) includes a plurality of individual load carrying ropes encased within a common layer of coating. The coating layer (28) separates the individual ropes (26) and defines an engagement surface (30) for engaging a traction sheave (24).

[Show in French]

Attorney, Agent, or
Firm:

Leckey, David Herbert ;

Family:

Patent	Issued	Filed	Title
<u>WO9943885A1</u>	Sept. 2, 1999	Feb. 19, 1999	TENSION MEMBER FOR AN ELEVATOR
<u>WO9943602A1</u>	Sept. 2, 1999	Feb. 19, 1999	BELT-CLIMBING ELEVATOR HAVING DRIVE IN COUNTERWEIGHT AND COMMON DRIVE AND SUSPENSION ROPE
<u>WO9943601A3</u>	Oct. 28, 1999	Feb. 19, 1999	DUAL SHEAVE ROPE CLIMBER USING FLAT FLEXIBLE ROPES
<u>WO9943601A2</u>	Sept. 2, 1999	Feb. 19, 1999	DUAL SHEAVE ROPE CLIMBER USING FLAT FLEXIBLE ROPES
<u>WO9943600A1</u>	Sept. 2, 1999	Feb. 19, 1999	ELEVATOR SYSTEM HAVING DRIVE MOTOR LOCATED AT THE BOTTOM PORTION OF THE HOISTWAY
<u>WO9943599A1</u>	Sept. 2, 1999	Feb. 19, 1999	DRUM DRIVE ELEVATOR USING FLAT BELT
<u>WO9943598A3</u>	Dec. 16, 1999	Feb. 26, 1999	TRACTION ELEVATOR SYSTEM HAVING MULTIPLE MACHINES
<u>WO9943598A2</u>	Sept. 2, 1999	Feb. 26, 1999	TRACTION ELEVATOR SYSTEM HAVING MULTIPLE MACHINES
<u>WO9943597A3</u>	Dec. 9, 1999	Feb. 26, 1999	ELEVATOR SYSTEM WITH COMPACT MACHINEROOM

<u>WO9943597A2</u>	Sept. 2, 1999	Feb. 26, 1999	ELEVATOR SYSTEM WITH COMPACT MACHINEROOM
<u>WO9943596A3</u>	Nov. 11, 1999	Feb. 19, 1999	ELEVATOR SYSTEM HAVING DRIVE MOTOR LOCATED ADJACENT TO HOISTWAY DOOR
<u>WO9943596A2</u>	Sept. 2, 1999	Feb. 19, 1999	ELEVATOR SYSTEM HAVING DRIVE MOTOR LOCATED ADJACENT TO HOISTWAY DOOR
<u>WO9943595A3</u>	Jan. 6, 2000	Feb. 19, 1999	MACHINE-ROOMLESS ELEVATOR SYSTEM WITH AN ELEVATOR MACHINE MOUNTED ON AN ELEVATOR CAR
<u>WO9943595A2</u>	Sept. 2, 1999	Feb. 19, 1999	MACHINE-ROOMLESS ELEVATOR SYSTEM WITH AN ELEVATOR MACHINE MOUNTED ON AN ELEVATOR CAR
<u>WO9943593A1</u>	Sept. 2, 1999	Feb. 19, 1999	ELEVATOR SYSTEM WITH OVERHEAD DRIVE MOTOR
<u>WO9943592A1</u>	Sept. 2, 1999	Feb. 19, 1999	BELT-CLIMBING ELEVATOR HAVING DRIVE IN COUNTERWEIGHT
<u>WO9943591A1</u>	Sept. 2, 1999	Feb. 19, 1999	FLAT CABLE CONNECTING DEVICE
<u>WO9943590A1</u>	Sept. 2, 1999	Feb. 19, 1999	TRACTION ELEVATOR SYSTEM USING A FLEXIBLE, FLAT ROPE AND A PERMANENT MAGNET MACHINE
<u>WO9943589A1</u>	Sept. 2, 1999	Feb. 19, 1999	ELEVATOR SYSTEM HAVING DRIVE MOTOR LOCATED BETWEEN

			ELEVATOR CAR AND HOISTWAY SIDEWALL
<u>WO40497A1</u>	July 13, 2000	Dec. 17, 1999	WEDGE CLAMP TYPE TERMINATION FOR ELEVATOR TENSION MEMBER
<u>WO37738A1</u>	June 29, 2000	Aug. 23, 1999	TENSION MEMBER FOR AN ELEVATOR
<u>US20010014996A1</u>	Aug. 23, 2001	April 30, 2001	Wedge clamp type termination for elevator tension member
<u>US6256841</u>	July 10, 2001	Dec. 31, 1998	Wedge clamp type termination for elevator tension member
<u>US6193018</u>	Feb. 27, 2001	Feb. 2, 2000	Belt-climbing elevator having drive in counterweight
<u>US6193016</u>	Feb. 27, 2001	Sept. 30, 1998	Dual sheave rope climber using flat flexible ropes
<u>US6138799</u>	Oct. 31, 2000	Sept. 30, 1998	Belt-climbing elevator having drive in counterweight
<u>US6068087</u>	May 30, 2000	Sept. 30, 1998	Belt-climbing elevator having drive in counterweight and common drive and suspension rope
<u>US6061879</u>	May 16, 2000	Dec. 23, 1998	Epoxy type termination for flexible flat termination member
<u>US5931265</u>	Aug. 3, 1999	March 27, 1997	Rope climbing elevator
<u>TW378194B</u>	Jan. 1, 2000	Feb. 26, 1999	DUAL SHEAVE ROPE CLIMBER USING FLAT FLEXIBLE ROPES
<u>JP10273274A2</u>	Oct. 13, 1998	March 26, 1998	ELEVATOR MOVED UP AND DOWN THROUGH ROPE
<u>EP1097102A1</u>	May 9, 2001	Feb. 19, 1999	BELT-CLIMBING ELEVATOR HAVING DRIVE IN COUNTERWEIGHT AND COMMON DRIVE AND SUSPENSION ROPE

<u>EP1097101A1</u>	May 9, 2001	Feb. 19, 1999	ELEVATOR SYSTEM HAVING DRIVE MOTOR LOCATED AT THE BOTTOM PORTION OF THE HOISTWAY
<u>EP1066213A1</u>	Jan. 10, 2001	Feb. 19, 1999	ELEVATOR SYSTEM WITH OVERHEAD DRIVE MOTOR
<u>EP1064216A2</u>	Jan. 3, 2001	Feb. 19, 1999	DUAL SHEAVE ROPE CLIMBER USING FLAT FLEXIBLE ROPES
EP1060305A1	Dec. 20, 2000	Feb. 19, 1999	TENSION MEMBER FOR AN ELEVATOR
<u>EP1056679A2</u>	Dec. 6, 2000	Feb. 19, 1999	MACHINE-ROOMLESS ELEVATOR SYSTEM WITH AN ELEVATOR MACHINE MOUNTED ON AN ELEVATOR CAR
<u>EP1056676A1</u>	Dec. 6, 2000	Feb. 19, 1999	BELT-CLIMBING ELEVATOR HAVING DRIVE IN COUNTERWEIGHT
<u>EP1056675A1</u>	Dec. 6, 2000	Feb. 19, 1999	ELEVATOR SYSTEM HAVING DRIVE MOTOR LOCATED BETWEEN ELEVATOR CAR AND HOISTWAY SIDEWALL
<u>EP1042211A1</u>	Oct. 11, 2000	Feb. 19, 1999	DRUM DRIVE ELEVATOR USING FLAT BELT
<u>EP1042210A2</u>	Oct. 11, 2000	Feb. 26, 1999	TRACTION ELEVATOR SYSTEM HAVING MULTIPLE MACHINES
<u>EP1042209A2</u>	Oct. 11, 2000	Feb. 19, 1999	ELEVATOR SYSTEM HAVING DRIVE MOTOR LOCATED ADJACENT TO HOISTWAY DOOR
<u>EP1037847A2</u>	Sept. 27, 2000	Feb. 26, 1999	ELEVATOR SYSTEM WITH COMPACT MACHINEROOM

<u>EP1028911A1</u>	Aug. 23, 2000	Feb. 19, 1999	FLAT CABLE CONNECTING DEVICE
<u>EP1023236A1</u>	Aug. 2, 2000	Feb. 19, 1999	TRACTION ELEVATOR SYSTEM USING A FLEXIBLE, FLAT ROPE AND A PERMANENT MAGNET MACHINE
<u>EP867395A3</u>	Jan. 20, 1999	March 27, 1998	Rope climbing elevator
<u>EP867395A2</u>	Sept. 30, 1998	March 27, 1998	Rope climbing elevator
<u>CN1299333T</u>	June 13, 2001	Feb. 19, 1999	BELT-CLIMBING ELEVATOR HAVING DRIVE IN COUNTERWEIGHT
<u>CN1298367T</u>	June 6, 2001	Feb. 19, 1999	ELEVATOR SYSTEM HAVING DRIVE MOTOR LOCATED BETWEEN ELEVATOR CAR AND HOISTWAY SIDEMALL
<u>CN1292051T</u>	April 18, 2001	Feb. 19, 1999	TENSION MEMBER FOR ELEVATOR
<u>CN1291960T</u>	April 18, 2001	Feb. 19, 1999	MACHINE- ROOMLESS ELEVATOR SYSTEM WITH ELEVATOR MACHINE MOUNTED ON ELEVATOR CAR
<u>CN1234362A</u>	Nov. 10, 1999	Feb. 25, 1999	WEDGE-SHAPE CLIP TYPE TERMINAL FOR TENSION ELEMENT OF ELEVATOR
<u>CN1229764A</u>	Sept. 29, 1999	Feb. 25, 1999	EPOXY TYPE TERMINATION FOR FLEXIBLE FLAT TERMINATION MEMBER
<u>BR9908305A</u>	Oct. 31, 2000	Feb. 19, 1999	SISTEMA DE ELEVADOR SEM CASA DE MAQUINA COM UMA MAQUINA DE ELEVADOR MONTADA EM UM CARRO DE


			ELEVADOR
BR9908304A	Oct. 31, 2000	Feb. 19, 1999	ASCENSOR A CABO EM ROLDANA DUPLA USANDO CABOS FLEXIVEIS CHATOS
BR9908230A	Oct. 31, 2000	Feb. 19, 1999	SISTEMA DE ELEVADOR COM MOTOR DE ACIONAMENTO SUSPENSO
BR9908228A	Oct. 31, 2000	Feb. 19, 1999	ELEMENTO DE TENSÃO PARA UM ELEVADOR
BR9908227A	Oct. 31, 2000	Feb. 19, 1999	ELEVADOR DE ELEVACAO POR CORREIA POSSUINDO UM CONTRAPESO DE ACIONAMENTO
58 family members shown above			

Other Abstract Info:

DERABS C1999-518806 DERABS C1999-518866 DERABS C2000-024248
 DERABS C2000-465522 DERABS G1999-518805 DERABS G1999-518807
 DERABS G1999-518808 DERABS G1999-540538 DERABS G1999-550849
 DERABS G1999-550850 DERABS G1999-600996 DERABS G1999-600997
 DERABS G1999-600998 DERABS G1999-600999 DERABS G1999-601000
 DERABS G1999-601001 DERABS G2000-127380

Foreign References:

No patents reference this one



**Nominate this
for the Gallery...**

[Subscribe](#) | [Privacy Policy](#) | [Terms & Conditions](#) | [FAQ](#) | [Site Map](#) | [Help](#) | [Contact Us](#)

© 1997 - 2001 Delphion Inc.